



Parmab Drivelement AB

Kulled

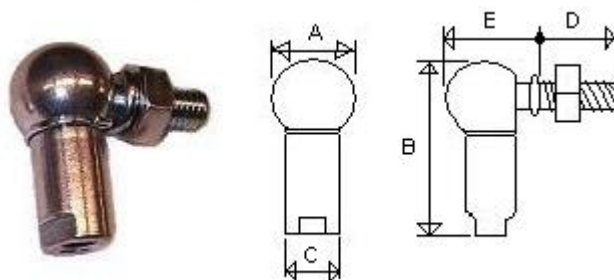

Art.	Gänga	A mm	B mm	C mm	D mm	E mm
02790	M6 x 1	15	32	10	12	18
02791	M8 x1,25	19	40	13	16	23
02792	M10 x1,5	24	46	16	20	26

Länkände

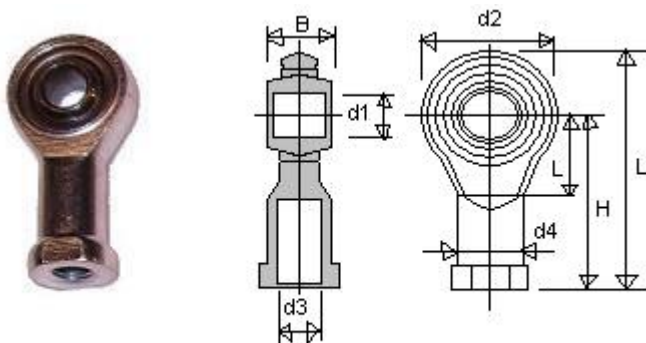

Art.	d1 mm	d2 mm	d3 mm	d4 mm	B mm	L mm	H mm	Lt mm
02876	6	20	M6	10	9	11	30	40
02877	8	24	M8	12,5	12	13	36	48
02878	10	28	M10	15	14	15	43	57
02879	12	32	M12	17,5	16	17	50	66


Wirelås



Art.	Diameter mm	Gänga	Wire mm	Brytpunkt (kg)
00562	5	M5	4-5	850
00564	6	M5	5-6	1100
00566	8	M6	7-8	1800
00568	10	M8	10	2800
00563	12	M10	12-13	4000
00565	14	M10	14-15	4500
00567	16	M12	16	5000
00251	20	M12	20	7600


Parmab Drivelement AB

Schackel

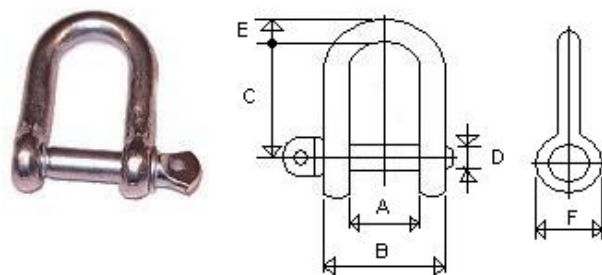

Art.	Lyftkraft (kg)	A mm	B mm	C mm	D mm	E mm	F mm
01211	100	13	25	28	6	6	14
00119	200	16	32	36	8	8	18
00123	320	19	39	43	10	10	20
00117	400	22	44	50	11	11	24
00124	520	25	49	57	12	12	28
00127	650	28	56	64	14	14	30
00128	800	32	64	72	16	16	33
00129	1100	38	78	86	20	20	40

Vantskruv

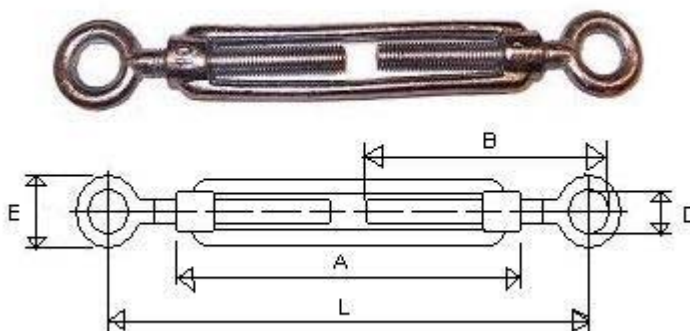

Art.	Gänga	Dragkraft (kg)	Tryck (kg)	A mm	B mm	D mm	E mm	L min	L max
00205	6	160	700	77	65	8	18	120	180
00206	8	275	1200	110	74	12	24	148	210
00207	10	400	1750	130	92	15	30	175	265
00209	12	700	2450	140	110	18	34	195	283
00223	16	1200	5000	190	158	24	52	295	427
00260	20	1750	8500	220	170	28	62	315	451