

## **LUN/LMU**

**UNIVERSAL LEVEL GAUGES IN PLASTIC OR METAL**




### **SMALL LEVELS**

The visual level gauges allow the liquid level to be checked in a clear and precise way at any time, and have the possibility to have an electrical signal.


# LUN

UNIVERSAL LEVEL INDICATORS WITH VARIABLE LENGTHS IN NYLON-GLASS

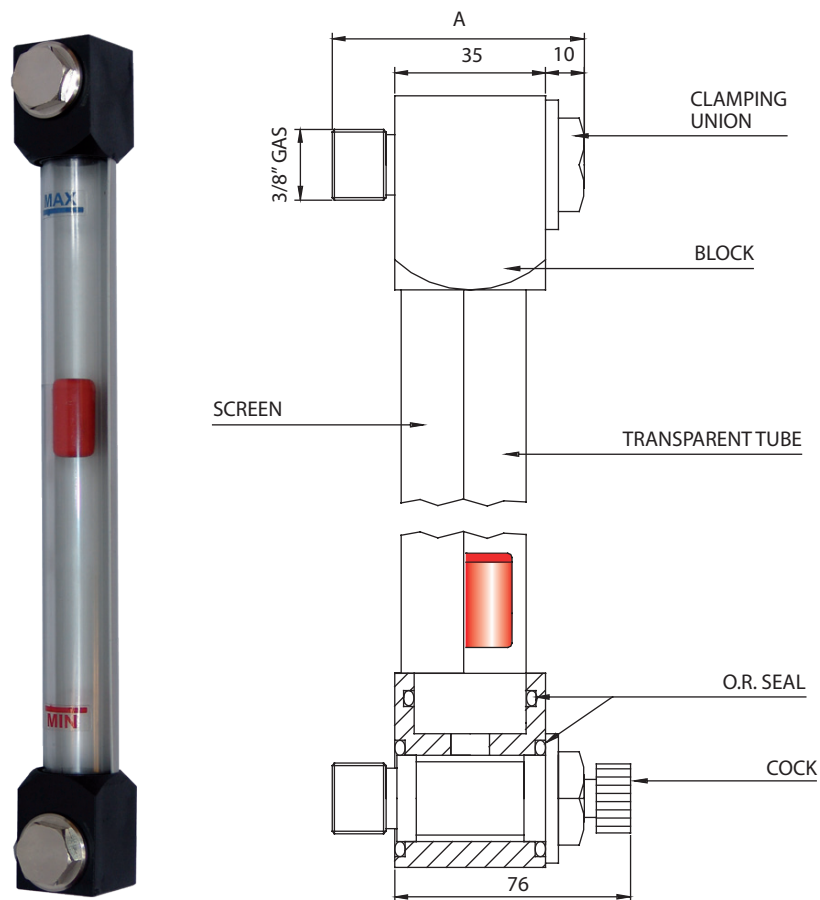

# LMU

UNIVERSAL LEVEL GAUGES IN ANODISED ALUMINIUM (AISI 316 S/STEEL ON REQUEST)

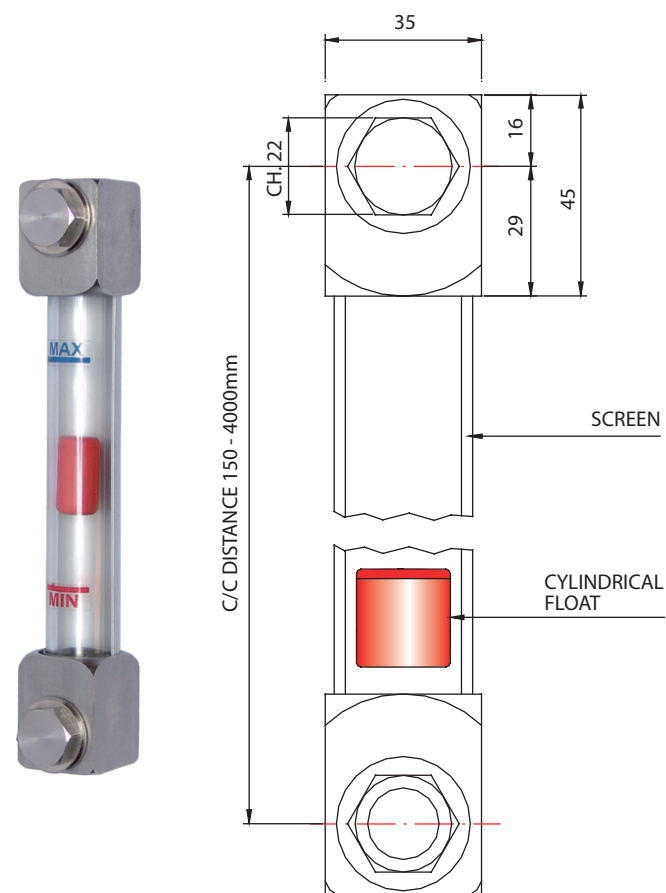

## UNIVERSAL LEVEL GAUGES WITH VARIABLE LENGTHS IN NYLON-GLASS

## UNIVERSAL LEVEL GAUGES IN ANODISED ALUMINIUM (AISI 316 S/STEEL ON REQUEST)

This type of visual level gauge, of medium size and high strength, normally consists of two bodies which house a transparent tube, reinforced and protected by an anodised aluminium half-round profile that also acts as a screen.

- The bodies can be in glass reinforced nylon, anodised aluminium or AISI 316 stainless steel.
- The tubes are in acrylic or pyrex glass.
- The 3/8" GAS unions, normally supplied in nickel-plated brass, can be ordered in AISI 316; a cock, only available in nickel-plated brass, can be supplied in place of the union.
- The float, normally in nylon (red), can be supplied in spansil (black) for high temperatures.
- On request, all the level gauges can be provided with a bimetal probe thermometer (L= 70mm) with Ø 40 mm body in chromed cast brass and scale of 0° ÷ 120°C (the thermometer is incorporated in the 3/8" GAS clamping union).
- For moderately aggressive liquids, on request the level gauges in nylon can have stainless steel unions; for more aggressive liquids the metal level gauge in s/steel (bodies and screws) can be supplied.
- A plug with breather (in aluminium) can be supplied in place of the upper block.
- Max pressure: 5 Bar.

VERSION	C/C DISTANCE	TUBE		BLOCKS		LOWER TAP		UPPER TAP		THERMOMETER	SCREWS 3/8 GAS		O-RING			NUT				
LUN	150-4000	A	METHACRYLATE (-70..+130°C)	N	NYLON-GLASS (-30..+130°C)	SS	WITHOUT	SS	WITHOUT	S	WITHOUT	A	BRASS PLATED A=58	1	NBR	(-30..+100°C)	A	WITHOUT		
						R0	BRASS PLATED OPEN / DOWNLOAD / CLOSE	R0	BRASS PLATED OPEN / DOWNLOAD / CLOSE					2	FKM	(-25..+200°C)	B		3/8 ALUMINIUM	
		P	PYREX (-70..+250°C)			R1	BRASS PLATED OPEN / CLOSE	R1	BRASS PLATED OPEN / CLOSE	T	BIMETALLIC PLACED IN THE LOWER SCREW - EXCLUDES THE COCK	B	BRASS PLATED A=68	3	E.P.D.M.	(-45..+155°C)		C		3/8 AISI 316 S/STEEL
						R2	AISI 316 S/STEEL OPEN / DOWNLOAD / CLOSE	R2	AISI 316 S/STEEL OPEN / DOWNLOAD / CLOSE					4	SILICONE	(-60..+200°C)				
						5	FEP	(-60..+205°C)												
LUN	1000	P		N		R2		SS		S		C		2			C			
VERSION	C/C DISTANCE	TUBE		BLOCKS		LOWER TAP		UPPER TAP		THERMOMETER	SCREWS 3/8 GAS		O-RING			NUT				
LMU	150-4000	A	METHACRYLATE (-70..+130°C)	A	ANODISED ALUMINIUM	SS	WITHOUT	SS	WITHOUT	S	WITHOUT	A	BRASS PLATED A=58	1	NBR	(-30..+100°C)	A	WITHOUT		
						R0	BRASS PLATED OPEN / DOWNLOAD / CLOSE	R0	BRASS PLATED OPEN / DOWNLOAD / CLOSE					2	FKM	(-25..+200°C)	B		3/8 ALUMINIUM	
		P	PYREX (-70..+250°C)	I	AISI 316 S/STEEL	R1	BRASS PLATED OPEN / CLOSE	R1	BRASS PLATED OPEN / CLOSE	T	BIMETALLIC PLACED IN THE LOWER SCREW - EXCLUDES THE COCK	B	BRASS PLATED A=68	3	E.P.D.M.	(-45..+155°C)		C		3/8 AISI 316 S/STEEL
						R2	AISI 316 S/STEEL OPEN / DOWNLOAD / CLOSE	R2	AISI 316 S/STEEL OPEN / DOWNLOAD / CLOSE					4	SILICONE	(-60..+200°C)				
						5	FEP	(-60..+205°C)												
LMU	1000	P		A		R2		SS		S		C		2			C			